

EXPRESS MAIL	LABEL	NO.	EI	958	698	639 L	JS

EXPRESS MAIL LAB	EL NO. EI 958 698 639 US				DT 0 10 D 10 F	/0.0E			
Please type a plus sign (+	) inside this box + Patent a	nd Trad	Approved fo emark Office; U.S. DEPARTM	or use thro ENT OF C	PTO/SB/05 ough 9/30/98, OMB 065 OMMERCE				
0002/PTO U.S. Departm REV. 6/95 Patent and Tra	nent of Commerce ademark Office	Attorr	ney Docket Number	63.666.90245					
NEM O.	TILITY PATENT	First I	Named Inventor	James	s F. Greenleaf				
	ON TRANSMITTAL for new applications only)	Total	Pages in the Submission	20					
Notice <sup>*</sup> Checklist items mention construct a new utility patent a 506, 601. (37 C.F.R. 1.77, 1.	ICATION ELEMENTS  ned under Application Elements section application. Please refer to MPEP Sections 53, 35 USC 111, 112, 1131 for detailed eness of an onginal patent application.		ACCOMPANYIN	IG APPI	LICATION PARTS				
2. Specification  X Title of the I  Cross Refere (if applicable)  Statement R Research/Dev  Reference to X Background of X Brief Summa  X Brief Descript  X Detailed Descript  X Claim or Claim  X Abstract of to 3. X Drawings (who 4. X Executed Decomplicable, ell must be Paper Copy  Computer Re	legarding Federally-sponsored relopment (if applicable)  o Microfiche Appendix (if applicable)  of the Invention  ry of the Invention  tion of the Drawings (if drawings filed)  cription  ms  the Disclosure  en necessary as prescribed by 35 USC 113)  claration  Submission		ACCOMPANYING APPLICATION PARTS  6. X Assignment Papers  7. Certified Copy of Priority Document(s) (if foreign priority is claimed)  8. Computer Program on Microfiche  9. English Translation of Document (if applicable)  10. Information Disclosure Citations  11. Petition Checklist and Accompanying Petition  12. Preliminary Amendment  13. Proprietary Information  14. X Return Receipt Postcard  15. Small Entity Statement  16. Additional Enclosures (please identify below)  SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT  Firm or Barry E. Sammons Individual Name  Signature						
	FOR OF		L USE ONLY			1			
Application Number  Date of Receipt	Application Type	Class			Independent Claims  Total Claims				
Sate of necespt	Filing Date		gn Filing License?		Drawing Sheets				

Burden Hour Statement: This form is estimated to take .2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Foreign Address?

Special Handling?

Small Entity

PTO/SB/17 (6-95) Approved for use through 9/30/98. OMB 0651-0032 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

002/PTO Rev. 10/96	U.S. Departme	ent of Commerce ademark Office	Complete if Known							
Rev. 10/96	ratent and 116	demark Office	Application Number							
			Filing D	ate						
FEE	TRANSMITTAL	_	First Na	amed I	nvente	or	James E. Gr	eenleaf		
4.7			Group	Art Uni	it					
			Examin	er Nan	ne					
TOTAL AMOUNT OF P	AYMENT \$ 830.00		Attorne	ey Doc	ket N	umber	630666.90245			
			<b>L</b>							
METHO	D OF PAYMENT (chec	k one)				FEE (	CALCULATION (con	tinued)		
1. X The Comindicated	missioner is hereby authorized fees and credit any over paym	I to charge nents to:	3. А	DDITIO	DNAL	FEES				
Deposit Account Number 17	-0055		Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)			Fee	
Deposit.			105	130	205	65	Surcharge - late filing fee or	oath		
Deposit Account Qu Name	arles & Brady		127	50	227	25	Surcharge - late provisional to	filing fee or		
X Charge Any Ao Fee Required CFR 1.16 and	Iditional Charge the Is	ssue Fee Set in 37 CFR lailing of the Notice of 7 CFR 1.311(b)	139	130	139	130	Non-English specification			
CFR 1.16 and	1.17 Allowance, 3	/ CFR 1.311(b)	147	2,520	147	•	For filing a request for reexa			
2. Payment E	nclosed:		112	920	112	*920	Requesting publication of SI action	R prior to Examiner		
2. Payment E	Check Money Order	Other	113	*1,840 110	113 215	•	Requesting publication of SI action  Extension for response withing			
FEE CALCU	LATION (fees effective	10/01/97)	116	400	216		Extension for response within			
1. FILING FEE			117	950	217		Extension for response within			
Large Entity Small			118	1,510	218	755	Extension for response withi	n fourth month		
Fee Fee Fee Code (\$) Code	Fee (\$) Fee Description	Fee Paid	119	310	219	155	Notice of Appeal			
101 790 201	395 Utility filing fee	790.00	120	310	220	155	Filing a brief in support of ar	appeal		
106 330 206	121 138	270 1,510	221 138		Request for oral hearing		$\vdash$			
107 540 207	540 207 270 Plant filing fee						Petition to institute a public u			
108 790 208	395 Reissue filing fee		140 110 240 55 Petition to revive unavoidably abandoned application							
114 150 214	75 Provisional filing for	ee	141	1,320	241	660	Petition to revive unintentionally abandoned application			
	OUDTOTAL (A)	700.00	142	1,320	242	660	Utility issue fee (or reissue)			
	SUBTOTAL (1) (\$	7790.00	143	450	243		Design issue fee			
0.0141140	Fee Extra bel	from Fee Paid	144	670 130	244 122		Plant issue fee  Petitions to the Commission	er.	<del> </del>	
2. CLAIMS  Total Claims  16	-20= 0 X 22.00		123	50	123		Petitions related to provision		$\vdash \neg$	
Independent 3	-3= 0 X 82.00		126	240	126	240	Submission of Information E	Disclosure Stmt		
Claims 3  Multiple Dependent Claims	270.0		581	40	581	40	Recording each patent assignment (times number of properties)	gnment per property	40.00	
	mall Entity		146	790	246	395	Filing a submission after fina 1.129(a))			
Fee Fee Fe Code (\$) Co	e Fee de (\$) Fee	e Description	149	790	249	395	For each additional invention CFR 1.129(b))	n to be examined (37		
103 22 20	3 11 Claims in ex	cess of 20					CFR 1.129(b))		<u></u>	
102 82 20	•	claims in excess of								
104 270 20 109 80 20	·	endent claim							$\vdash$	
		ependent claims ove nt	Other	ree (spe	chy) _					
110 22 21	0 11 Reissue clai and over orig	ms in excess of 20 ginal patent					SUBT	OTAL (3) (\$)40.0	00	
	SUBTOTAL (2)	(\$)0.00		· Redu	ced bv	Basic Fil	ling Fee Paid	L		
					~ ;		<u> </u>			
SUBMITTED BY							Complete (if application	1		
Typed or Printed Name Barr	9E. Sammons						Reg. Number	25,608		
Signature	must summe	PM Date	13-	1 16	P	97	Deposit Account User ID	17-0055		

# ACOUSTIC FORCE GENERATION BY AMPLITUDE MODULATING A SONIC BEAM

# Statement Regarding Federally Sponsored Research

This invention was made with United States

Government support awarded by the National Institute of

Health (NIH) Grant No.: CA43920. The United States

Government has certain rights in this invention.

### Background Of The Invention

The field of the invention is the detection and imaging of objects using acoustic beams.

In the field of medical imaging there are a number 10 of modes in which ultrasound can be used to produce images of objects within a patient. The ultrasound transmitter may be placed on one side of the object and the sound transmitted through the object to the ultrasound receiver placed on the other side ("transmission" mode). With transmission mode methods, an image may be produced in which the brightness of each image pixel is a function of the amplitude of the ultrasound that reaches the receiver ("attenuation mode"), or the brightness of each pixel is a function of 20 the time required for the sound to reach the receiver ("time-of-flight" or "speed of sound" mode). alternative, the receiver may be positioned on the same side of the object as the transmitter and an image may be produced in which the brightness of each pixel is a function of the amplitude of the ultrasound reflected from the object back to the receiver ("reflection", "backscatter" or "echo" mode). In another mode of operation ("Doppler" mode) the movement of the object is detected and imaged by measuring the phase of the 30 ultrasound reflected from the object back to the

receiver.

In all of these medical imaging applications ultrasonic waves are transmitted and ultrasonic waves are The higher sonic frequencies enable precise beams to be formed in both the transmit and receive 5 modes. Ultrasonic transducers for medical applications are constructed from one or more piezoelectric elements sandwiched between a pair of electrodes. piezoelectric elements are typically constructed of lead zirconate titanate (PZT), polyvinylidene diflouride (PVDF), or PZT ceramic/polymer composite. The electrodes 10 are connected to a voltage source, and when a voltage waveform is applied, the piezoelectric elements change in size at a frequency corresponding to that of the applied voltage. When a voltage waveform is applied, the piezoelectric elements emits an ultrasonic wave into the media to which it is coupled at the frequencies contained in the excitation waveform. Conversely, when an ultrasonic wave strikes the piezoelectric element, the element produces a corresponding voltage across its 20 electrodes. A number of such ultrasonic transducer constructions are disclosed in U.S. Patent Nos. 4,217,684; 4,425,525; 4,441,503; 4,470,305 and 4,569,231.

When used for ultrasonic imaging, the transducer typically has a number of piezoelectric elements arranged in an array and driven with separate voltages (apodizing). By controlling the time delay (or phase) and amplitude of the applied voltages, the ultrasonic waves produced by the piezoelectric elements (transmission mode) combine to produce a net ultrasonic wave that travels along a preferred beam direction and is focused at a selected point along the beam. By controlling the time delay and amplitude of the applied voltages, the beam with its focal point can be moved in a plane to scan the subject. A number of such ultrasonic imaging systems are described in U.S. Patent Nos. 4,155,258; 4,155,260; 4,154,113; 4,155,259; 4,180,790;

4,470,303; 4,662,223; 4,669,314; 4,809,184; 5,081,995 and 5,492,121.

The acoustic radiation force exerted by an acoustic wave on an object in its path is a universal phenomenon common to all forms of radiated energy. When a beam of light is absorbed or reflected by a surface, a small force is exerted on that surface. The same is true for electromagnetic waves, transverse waves on an elastic string, and surface waves on a liquid. This force is produced by a "radiated pressure" and a complete disclosure of this phenomenon is set forth by G.R. Torr, "The Acoustic Radiation Force", Am. J. Phys. 52(5), May 1984.

The measurement of radiation force exerted by sound waves has become important in recent years to determine 15 the power outputs of medical imaging ultrasonic transducers, Beissner, K., "Measurement Techniques In Ultrasonic Exposimetry, " eds. M.C. Ziskin and P.A. Lewin, CRC Press, Boca Raton, 1993. The transducer is submerged 20 in a tank of water and the ultrasonic beam is directed towards an absorbing or reflecting target in the tank. An absorbing target may be realized by a slab of natural rubber, or a reflecting target by an air-backed thin metal plate. If the ultrasonic beam is directed horizontally, the force can be determined by suspending 25 the target as a pendulum and measuring its deflection. The measurements are made in water because the characteristic acoustic impedances of water and human soft tissue are similar, thus the measured ultrasonic beam power is virtually equal to the power radiated by the transducer into the human body provided that the effect of tissue loss has been accounted for.

It is generally accepted that the radiation force F exerted on a totally absorbing target by an ultrasonic beam of power P is given by the equation

F = P/c

25

30

where c is the speed of sound in the medium surrounding the target. For normal incidence on a plane reflecting surface the radiation force has twice this value. speed of sound in water is 1500m/s, thus the radiation 5 force on an absorbing target in water is about 6.67x10<sup>-4</sup> newtons/watt.

This sonic radiation force has found application in medicine in the field of extracorporeal shock wave lithotripsy. By applying a set of powerful acoustic shock waves at the surface of the patient such that their energies focus on a target inside the patient, objects such as renal or gall-stones can be fragmented. lithotripsy systems are described, for example, in Goldstein, A., "Sources of Ultrasonic Exposure," 15 <u>Ultrasonic Exposimetry</u>, eds. M.C. Ziskin and P.A. Lewin, CRC Press, Boca Raton, 1993.

Another application which employs an ultrasonic radiation force produced by a transducer is disclosed by Sugimoto et al, "Tissue Hardness Measurement Using The 20 Radiation Force Of Focused Ultrasound", IEEE Ultrasonics Symposium, pp. 1377-80, 1990. In this experiment, a pulse of focused ultrasonic radiation is applied to deform the object which is positioned at the focal point of the transducer. The deformation is measured using a separate pulse-echo ultrasonic system and the hardness of the deformed object is measured. Measurements are made based on the rate of object deformation as the acoustic force is continuously applied, or by the rate of relaxation of the deformation after the force is removed.

A similar system is disclosed by T. Sato, et al. "Imaging of Acoustical Nonlinear Parameters and Its Medical and Industrial Applications: A Viewpoint as Generalized Percussion", Acoustical Imaging, Vol. 20, pg 9-18, published in 1993 by Plenum Press. In this system a lower frequency wave (350 kHz) is produced to act as a percussion force, and an ultrasonic wave (5 MHz) is used

30

in a pulse echo mode to produce an image of the subject. The percussion force is said to perturb second order nonlinear interactions in tissues, which reveal more structural information than the conventional ultrasonic pulse/echo system alone.

### Summary Of The Invention

The present invention is a method and system for producing an acoustic radiation force at a target location by directing a high frequency sound beam at the location. The high frequency sound beam is amplitude modulated and a radiation force is produced at the location which varies in accordance with the amplitude modulation.

A general object of the invention is to detect or

15 characterize an object based on its mechanical
properties. An object at the location of the beam will
respond to the applied acoustic radiation force by
producing an acoustic wave that can be detected with a
microphone or other detection apparatus. The detected

20 acoustic wave may be used to detect the presence of the
object or it may be used to detect and evaluate the
mechanical properties of the object.

Another object of the invention is to produce an image of the target object. The high frequency sound beam may be moved to scan the object and signals indicative of the acoustic wave produced at each scanned location may be acquired. The acquired signals are used to produce an image of the object.

Another object of the invention is to project a force into an object to measure the object's mechanical characteristics. The radiation force produced by the high frequency sound beam produces motion at the location which can be detected and analyzed to measure the mechanical characteristics at that location. Detection

25

30

can be performed in a number of ways, including Doppler ultrasound and nuclear magnetic resonance imaging.

Yet another object of the invention is to regenerate baseband audio at a remote location. By modulating the 5 high frequency sound beam with a baseband audio signal, the radiation force at the location will vary as a function of the baseband audio signal and a corresponding acoustic wave is produced. By using the highly directional high frequency sound beam, therefore, a nondirectional audio wave can be precisely produced at the location.

The foregoing and other objects and advantages of the invention will appear from the following description. In the description, reference is made to the accompanying 15 drawings which form a part hereof, and in which there is shown by way of illustration a preferred embodiment of the invention. Such embodiment does not necessarily represent the full scope of the invention, however, and reference is made therefore to the claims herein for 20 interpreting the scope of the invention.

# Brief Description Of The Drawings

Fig. 1 is a block diagram of a first embodiment of the invention used to detect the presence of an object according to the present invention;

Fig. 2 is a block diagram of a second embodiment of the invention used to image an object according to the present invention; and

Fig. 3 is a block diagram of a third embodiment of the invention used to convey a signal acoustically to a distant target object according to the present invention.

#### General Description Of The Invention

Consider an ultrasonic source directing its beam on a large target in water. The radiation force, F, for the plane wave case is commonly written as

F = KP/C, (1)

where P, c, and K are the time averaged acoustic power, sound speed in water, and a constant, respectively. The value of K for a perfectly absorbing target is 1, and for a perfectly reflecting target it is 2. For a focused beam impinging on a partially reflecting target of arbitrary size, the linear relation of (1) still holds, however, the value of K is different and can be determined as a function of target power reflection coefficient and its size as described by J.Wu, "Calculation of Acoustic Radiation Force Generated by Focused Beams Using the Ray Acoustic Approach," J. Acoust. Soc. Am. 97(5), pt. 1, May 1995.

In the present invention the high frequency field is generated by a single, ultrasonic source (single element or array of elements) driven by an amplitude modulated signal. The carrier frequency is  $\omega_0$  and the modulating signal, h(t), is defined as:

$$h(t) = \sqrt{u(t)}, \tag{2}$$

20 where

$$u(t) = 1 + f(t)$$
. (3)

The signal f(t) is a low frequency signal. We assume |f(t)|<1, also we assume that the bandwidth of f(t) is much less than the carrier frequency  $\omega_0$ .

We assume the beam is propagating along the z-axis. The field on the z=0 plane can be written as

$$s(t) = g(x, y) h(t) cos(\omega_0 t), \qquad (4)$$

where g(x,y) is the beam profile on the z=0 plane. It can be shown that the acoustic power density has slow

variations about its long time average. Denoting this component by  $P_1(t,x,y)$ , we can write

$$P_{1}(t,x,y) = \frac{1}{2}g^{2}(x,y)h^{2}(t).$$
 (5)

Assuming a target is present at z=0 plane, then referring to Equation (1), the radiation force exerted on this target by  $P_1(t,x,y)$  may be found by the following integration:

$$F_{1}(t) = \frac{K}{c} \int \int P_{1}(t,x,y) dx dy . \tag{6}$$

The result of this integration is a function proportional to  $h^2(t) = 1 + f(t)$ . The time-varying component of this force vibrates the target proportional to the signal f(t). The target displacement due to this force, r(t), may be written as

$$r(t) = \frac{1}{2} K^{\prime} f(t) \tag{7}$$

where K' is a constant whose value depends on size, power reflection coefficient, and other mechanical parameters of the target, such as mass and damping factors, that determine its response to a given force.

Within the target area the force indicated by

Equation (6) will be applied to the object. The manner in which the object responds to this force will, of course, depend on its mechanical characteristics. As the embodiments of the invention described below will indicate, there are many uses for this invention which stem from its ability to accurately project a low frequency acoustic force to a defined area.

The response of an object to the radiation force may be explained by considering a simplified, one-dimensional equation of motion for the mass-spring model. model, we assume a mass m is held by a spring having a 5 "stiffness constant" of  $\mu$ . We also assume that motion of this mass is damped by friction or by other mechanisms represented by the "resistance constant"  $R_m$ . Now consider a sinusoidal force  $F_1(t) = A\cos\omega_m t$  being applied to this As described by P.M. Morse and K.V. Ingard, "Theoretical Acoustics," McGraw Hill, 1968, the steadystate motion of the mass due to this force can be written as:

$$x(t) = A \cos (\omega_m t + \phi) / \omega_m |Z_m|$$

where

10

$$Z_{m} = R_{m} - j \left(\omega_{m} - \mu/\omega_{m}\right)$$

is the mechanical impedance, and

$$tan\phi = (\omega_m - \mu/\omega_m)/R_m$$

Thus the amplitude and phase of the displacement of the mass are determined by the mechanical properties  $\textbf{m},\ \textbf{R}_{\textbf{m}}$ and  $\mu$ . At its resonant frequency, where  $\omega_{m} = \sqrt{\mu/m}$ , the 20 amplitude of the motion reaches its maximum value.

## Description Of The Preferred Embodiment

Referring particularly to Fig. 1, a first embodiment of the invention is used to detect the presence of an object based upon the acoustic wave produced by the object in response to the applied force  $F_1(t)$ . detector system includes an ultrasonic transducer 10 which produces a focused beam 14 of beamwidth w = 2mm at

25

its focal point. The transducer 10 is driven by an RF generator 18 that produces an ultrasonic frequency  $\omega_0$  =  $2\pi$ x 3,500,000 rad./sec. This carrier signal  $\omega_0$  is applied to an amplitude modulator 19 which also receives the modulating signal h(t). Here we assume  $f(t) = \cos \omega_m t$ , where The modulated carrier is amplified in power amplifier 20 and applied to the transducer 10.

The acoustic field produced by the object 21 in response to the force produced by the focused beam 14 is received by a hydrophone 22. The received signal is applied through a band-pass filter 24 to an audio amplifier 26. The band-pass filter 24 has a narrow pass band centered on  $\omega_{\scriptscriptstyle m}$  to reject noise and any reflected ultrasonic signals. The amplified audio signal may be 15 applied to a loudspeaker 28 or an earphone to provide the operator with an indication of the amplitude of the acoustic wave produced by the object 21. The transducer 10 can be moved physically to scan the object 21, or in the alternative the beam 14 can be steered electronically 20 to scan the object 21. An alternative choice for h(t) can be, for example,  $h(t) = \cos \omega_m t$ . In this case, the acoustic field produced by the object is proportional to In this case the band pass filter 24 must be the  $cos2\omega_m t$ . centered around  $2\omega_m$ .

A second embodiment of the invention is a novel imaging system. Rather than relying on the reflection or attenuation of an ultrasonic wave by the object as is done in ultrasound imagers, the imager of the present invention relies on other mechanical properties of the object. More specifically, the ability of the object to convert the force F<sub>1</sub>(t) to an acoustic wave that can be detected by the receiver.

Referring particularly to Fig. 2, the imaging system includes a focused transducer 30 which produces a beam 38 which has a focal region from 6 cm to 13 cm, and a beamwidth of w=2mm (defined as the full-width at half-

30

maximum). The transducer 30 is driven by an RF generator 32 which produces a carrier signal  $\omega_0=2\pi$  x 3,500,000 rad./sec. The carrier signal  $\omega_{\text{o}}$  is amplitude modulated at 34 by a modulating signal h(t), and the modulated carrier is amplified by power amplifier 36.

The sonic wave produced by the target object 42 in response to the force  $F_1(t)$  is received by a hydrophone 44 and digitized. The receiver signal is filtered by a band-pass filter 46 centered on the frequency of the signal h(t), amplified at audio amplifier 48 and 10 digitized by a 12-bit analog-to-digital converter 50 at 100,000 samples/sec. The processor 52 calculates the mean amplitude (or the standard deviation) and/or phase of 600 samples of the digitized signal, then stores this 15 value in the image array 54 at a location corresponding to the position of the focal spot of beam 38. Processor 52 also controls other parts of the system to carry out the scan process. It steers the beam 38 to raster scan the object 42 in the x-y (or x-z) plane. Beam steering 20 is accomplished either mechanically using two stepper motors (not shown), or by well known phased array techniques. Processor 52 also provides the trigger signals needed to synchronize the scanning and digitization function. The resulting image produced after a complete raster scan may be enhanced using known image enhancement methods and/or displayed on a monitor 56. A two-dimensional image is thus produced in which the gray scale intensity of each pixel indicates the acoustic level and/or phase produced by the target 42 in response to the applied force  $F_1(t)$ .

A variation of this two-dimensional imaging system can be used to acquire a three-dimensional image in which two dimensions are spatial (x,z) and the third dimension is modulation frequency amplitude. In this alternative, the signal f(t) is swept through a range of modulation frequencies. The acquired signal samples at each x,z

30

beam location are stored at successive frequency bins in the image array 54. The resulting frequency dimension provides the information needed for analyzing the spectrum of the object's acoustic response to mechanical 5 stimulations at different frequencies.

As an example application, one can make use of this method to identify calcification in tissue and estimate its thickness and size. Referring to the mass-spring model described above, the amplitude of the motion peaks 10 at the resonant frequency, and this is proportional to  $1/\sqrt{m}$ . Calcification with different thicknesses have different masses, thus resonating at different frequencies. Hence, when examining different regions of calcification by the variable modulation frequency 15 method, one can expect to see peaks at different frequency bins depending on the thickness and size of the calcification.

Other imaging modalities can also be used to measure the motion resulting from the radiation force produced by the present invention. For example, a magnetic resonance imaging ("MRI") system, such as that described in copending U.S. patent application serial no. 325,834 filed October 19, 1994 and entitled "MR Imaging Of Synchronous Spin Motions And Strain Waves" can be used to image the mechanical characteristics of the scanned object. this system a motion sensitizing magnetic field gradient on the MRI system is synchronized with the applied radiation force (i.e. the signal f(t)) and the resulting motion is precisely indicated by the phase of the acquired NMR signals. As described in this co-pending application which is incorporated herein by reference, nearly all mechanical properties of the imaged object can be measured and used to modulate the intensity of a reconstructed image. This method can be used to provide 35 a map of tissue stiffness which is an excellent tool to

10

detect deep tumors. Again, an alternative choice for h(t) is  $h(t) = \cos \omega_m t$  in which case the acoustic field is proportional to  $\cos 2\omega_m t$ . In this case the band pass filter is centered around  $2\omega_m$  rather than  $\omega_m$ .

A third embodiment of the invention serves an entirely different function than those described above. Rather than obtaining an indication of the presence or nature of a target object, in the third embodiment of the invention information is transferred to the target object in the form of acoustical energy. By using an ultrasonic beam which can be finely focused and directed, this transfer of information can be precisely targeted.

Referring particularly to Fig. 3, the audio regeneration system includes an ultrasound transducer 80 that produces a beam 84 which focuses on a target object 88. The beam width at its focal point is w=2mm. The transducer 80 is driven by an RF generator 90 which produces a high frequency carrier signal  $\omega_0$  at a frequency of 3.5 MHz. The carrier signal  $\omega_0$  is applied to an amplitude modulator 96 which also receives a modulating signal h(t). The output of the modulator 96 (h(t)cos( $\omega_0$ t)) is applied through a power amplifier 94 to the transducer 80.

The modulating signal h(t) is produced by a square 25 root circuit 98. It receives as its input the baseband signal f(t) plus "1". The baseband signal f(t) is less than "1".

The ultrasonic beam 84 causes the target object 88 to vibrate in response to the baseband signal f(t). The beam 84 is made very directive because the wavelength of the ultrasound beam at carrier frequency  $\omega_0$  is very small compared to that of the baseband signal f(t). The target 88 acts as the converter of the high frequency ultrasound energy to the baseband frequency energy and the frequency response can be made very flat because the bandwidth of

15

25

30

the baseband signal f(t) is very small relative to the ultrasound carrier frequency  $\omega_0$ .

One medical application of this embodiment of the invention is a hearing aid. The transducer is positioned 5 along side the user's temple and the ultrasonic beam is directed to structures in the inner ear. The baseband signal f(t) is the ambient sound picked up by a microphone and amplified. This ambient sound is reproduced in the inner ear by vibrating structures in The eardrum and the middle ear are the inner ear. completely by-passed by this sound regeneration system, and patients with hearing loss due to problems in these structures can be helped.

While in many medical applications the transducer is positioned outside the patient and directs ultrasound into an object in the patient, it is also possible to place the transducer inside the patient. For example, the transducer may be mounted on the end of a catheter as described, for example, in U.S. patent No. 5,345,940 and 20 inserted into the patient through the vascular system. This enables the transducer to be positioned closer to the target object.

The invention can be used to remotely measure the elastic constants of a material. For example, a swept frequency force can be applied to a metallic rod to measure its resonant frequency. The resonant frequency can be used to accurately measure the Young's modulus of the rod material.

The invention can also be used for accurate and remote measurement of the sheer viscosity, or the density, of a liquid. This can be done by aiming the ultrasound beam on a well characterized tuning fork immersed in the liquid. The sheer viscosity or the density can be measured accurately and remotely by measuring the shift in the resonant frequency of the

tuning fork with respect to its natural resonant frequency in vacuum.

#### Claims

1. A detector system for indicating the presence of an object, the combination comprising:

a sonic beam producer for producing a sonic beam at a high frequency  $\omega_0$  which is directed at the object;

an amplitude modulator for supplying a signal to the sonic beam producer at the high frequency  $\omega_0$  which is modulated in amplitude at a modulation frequency; and

a detector for receiving a sonic wave produced at the modulation frequency by the object and the detector 10 having means for indicating the presence of the object in response to the received sonic wave.

- 2. The detector system as recited in claim 1 in which the modulation frequency is within the audible hearing range of humans and the detector indicates its presence by producing an audible sound.
- 3. The detector system as recited in claim 1 in which the modulation frequency is swept through a range of frequencies such that the frequency of the sonic wave is also swept through a range of frequencies.
- 4. The detector system as recited in claim 1 in which the object is located within a human subject and the sonic beam producer and the detector are located outside the human subject.

5. A detector system for indicating the mechanical characteristics of an object, the combination comprising:

a sonic beam producer for producing a sonic beam at a high frequency  $\omega_0$  which is directed at the object;

an amplitude modulator for supplying a signal to the sonic beam producer at the high frequency  $\omega_0$  which is modulated in amplitude to produce a force in the object corresponding to the modulating signal; and

means for detecting motion in the object caused by the force.

- 6. The detector system as recited in claim 5 in which the means for detecting is an ultrasonic Doppler system.
- 7. The detector system as recited in claim 5 in which the means for detecting is a nuclear magnetic resonance system.
- 8. The detector system as recited in claim 5 in which the frequency of the modulating signal is varied over a range of frequencies such that the frequency of the force is also varied over a range of frequencies.
- 9. The detector system as recited in claim 5 in which the object is located within a human subject and the sonic beam producer and the means for detecting are located outside the human subject.

10

10. An imaging system which comprises:

a sonic beam producer for producing a sonic beam at a high frequency  $\omega_0$  which is directed at the object to be imaged;

an amplitude modulator for supplying a signal to the sonic producer at the high frequency  $\omega_0$  which is modulated in amplitude at a modulation frequency;

means for moving the sonic beam to scan its focal point over a region in the object to be imaged;

a detector for receiving a sonic wave produced at the modulating frequency by the object as it is scanned and producing an output signal indicative of the amplitude of the sonic wave; and

a display for receiving the output signal and 15 producing an image indicative of the amplitude of the sonic wave emanating from locations in said region.

- 11. The imaging system as recited in claim 10 in which the object is located within a human subject and the imaging system is located outside the human subject.
- 12. The imaging system as recited in claim 10 in which the modulating frequency is changed over a range of values as the focal point scans the region to be imaged, and the detector receives the sonic waves produced at the corresponding frequencies.

13. A regeneration system for projecting an audio signal to a location in an object, the combination comprising:

a sonic beam producer for producing a high frequency sonic beam that passes into the object and to the location; and

an amplitude modulator for supplying a signal to the sonic beam producer at the high frequency which is modulated in amplitude with the audio signal;

whereby the modulated sonic beam produces a force on the object at the location that varies as a function of the audio signal, and whereby said force reproduces the audio signal through vibration of said object.


- 14. The regeneration system as recited in claim 13 in which the object is an animal.
- 15. The regeneration system as recited in claim 13 in which the object is a body of water.
- 16. The regeneration system as recited in claim 13 in which the object is a room and the sonic beam passes through air in the room.

# Abstract Of The Disclosure

A force is produced within an object by an ultrasonic beam. The frequency of this force is equal to the frequency of a signal used to modulated the amplitude of the beam. The sonic waves produced by the object in response to the force can be used to detect the presence of objects or to image objects based on their mechanical properties. It can also be used to regenerate a desired audio signal in the object.

qb2\263937



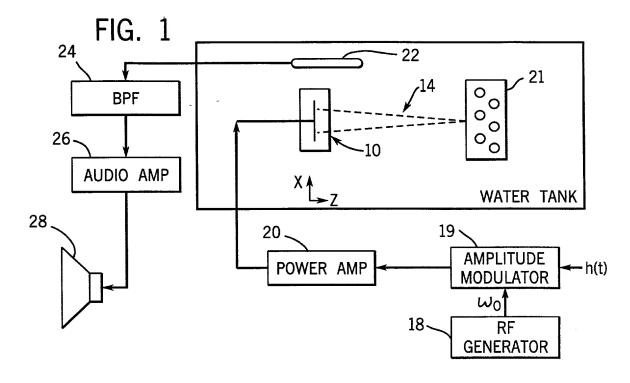


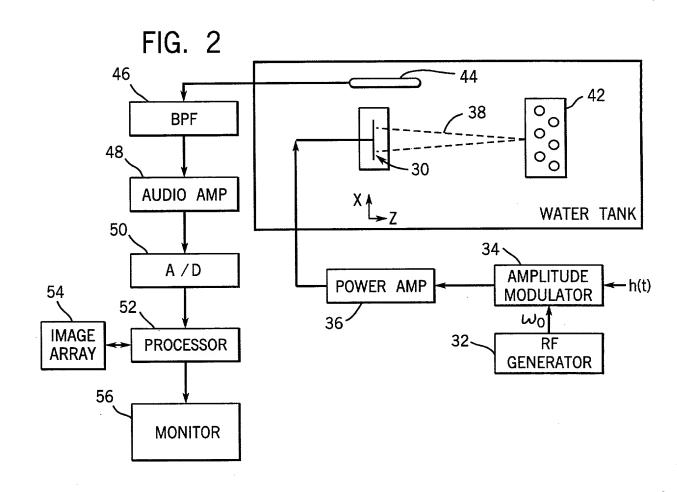


FIG. 3

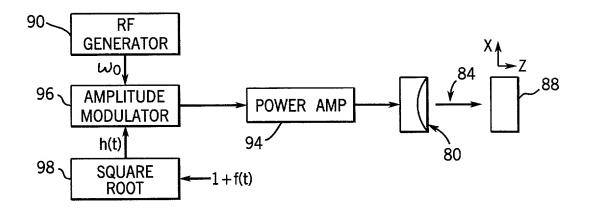

U.S. Department of Commerce Patent and Trademark Office

Please type a plus sign (+) inside this box

DECLARATION FOR

UTILITY OR DESIGN

PATENT APPLICATION

Application Number(s)

60/032,123

0010/PTO Rev. 6/95

PTO/SB/01 (6-95) Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

COMPLETE IF KNOWN

630666.90245

Greenleaf, James F.

Additional provisional

application numbers are listed on a

supplemental priority sheet attached hereto.

Attorney Docket Number

First Named Inventor

Application Number

Filing Date

Group Art Unit Declaration Declaration OR Submitted after Submitted with Initial Filing **Examiner Name** Initial Filing As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: ACOUSTIC FORCE GENERATION BY AMPLITUDE MODULATING A SONIC BEAM (Title of the Invention) the specification of which X is attached hereto The state of OR as United States Application Number or PCT International was filed on (MM/DD/YYYY) and was amended on (MM/DD/YYYY) (if applicable). Application Number 1.4 I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment l acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed. Certified Copy Attached? Priority Not Claimed oreign Filing Date (MM/DD/YYYY) Prior Foreign Application Number(s) Country Additional foreign applications numbers are listed on a supplemental priority sheet attached hereto:

Burden Hour Statement: This form is estimated to take .4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below. Filing Date (MM/DD/YYYY)

12/05/96

			LA	D	Λ	TI	0	N
v	ᆮ	u	ᆫᄱ	n	м		U	IN

Page 2

the United State application or P	penefit under Title 35, es of America, listed PCT international appli ich is material to pate the national or PCT ii	below and, insorar a cation in the manner ntability as defined i	is the subject r provided in in Title 37. C	the first placed of Fed	reacts of the Ci	diilis Ul IIIIs d	States Code §112 1:	acknowler	dae the duty to	disclose
	nt Application		T Parent		Parent	Filing Dat			nt Number	
	umber	Number (MM/DD/YYYY) (if applicable)  or PCT international application numbers are listed on a supplemental priority sheet attached hereto								
	I borobic s	ongint the follow	ing attorne	v(s) and/	or agent(s) to	prosecute	this application and	i all cont	inuation and	
divisional app	olications based the	ereon, and to trans	sact all bus	siness in	the Patent ar	nd Trademar	k Office connected	tilerewi	th:	
Firm N	Name						Customer or la Number	bel		
OR X List att	orney(s) and/or	agent(s) name a	and regist	ration n	umber belo	w		T		
	Name			tration nber		1	Vame		Registr Numl	
Neil E. Harhomas Neiry E. S. J. Rodma Nicholas George E. Harvey D. Michael C. Carl R. S. Ad Please dire  Name Address							33 56 90 667 33 07 065 094			
	411 East Wis	SCONSIII Ave.	. Suite	2000	Sta	te Wi		Zip	53202-4	1497
	USA		Telepho	one (	(414) 27	7-5000	Fax (4	114)	271-3552	2
information willful false 18 of the l	eclare that all stand and belief are less statements and United States Country thereon.	believed to be t	rue; and i	turther t Inishahl	that these s e by fine or	tatements imprisonn	were made witi nent, or both, ur	ider Sec	ction 1001	OI THE
Name of Se	ole or First Inve	ntor				A petition	has been filed fo	r this u	nsigned inv	entor
Given	James		Middl	e F.	Family	Gree	nleaf		Suffix	
Inventor's Signature	Inventor's James Scenley Date 15 Oct 97									
Residence:	Rochest	er		(	State MN	Country	USA	Cit	izenship	USA
Post Office	1068 P	lummer Land	e S.W		•					
Post Office							·			
City R	Rochester	Sta	te MN	Zip 55	905	Country	USA		&pplical	R <b>ỷ</b>
I XI	Additional in	ventors are	being n	amed	on suppl	emental	sheet(s) atta	ched l	nereto	

Residence:

Post Office

City

Please type a plus sign (+) inside this box + **ADDITIONAL INVENTOR(S) DECLARATION** Supplemental Sheet A petition has been filed for this unsigned inventor Name of Additional Joint Inventor, if any: Suffix Middle Family Fatemi-Booshehri Given Mostafa inventor's Date Signature USA Iran State MN Country Citizenship Residence: Rochester 1738 4th Avenue, S.W. Post Office Post Office theileas 55902 **USA** State MN Zip Country Rochester City A petition has been filed for this unsigned inventor Name of Additional Joint Inventor, if any: Date inventor's Signatue Citizenship State WI Country Residence: Post Office Post Office Applicant Zip Country City State A petition has been filed for this unsigned inventor Name of Additional Joint Inventor, if any: Suffix Family Middle Given Date Inventor's Signature Citizenship State WI Country Residence: Post Office Post Office Applicant State Zip Country City A petition has been filed for this unsigned inventor Name of Additional Joint Inventor, if any: Middle Given nventor's Date Signature

WI

State

Additional inventors are being named on supplemental sheet(s) attached hereto

Zip

State

Country

Country

Citizenship

Applicant